

형번 : TL-40W , TL-50W , TL-60W (공통 도면)



2019. 12.09

재질 : 알루미늄 다이캐스팅



무게 : 3.4Kg

각도조절 가능 : +/- 15도


적용 암대 직경 : 42.7φ

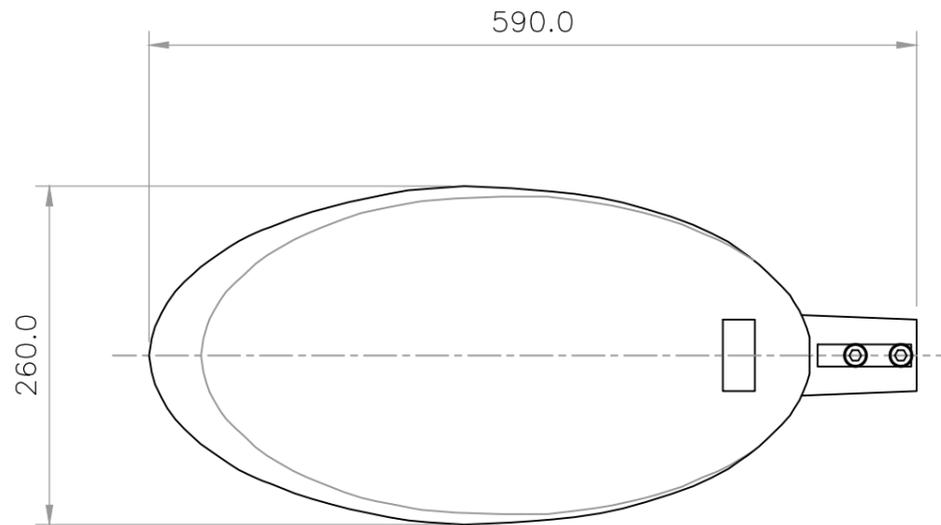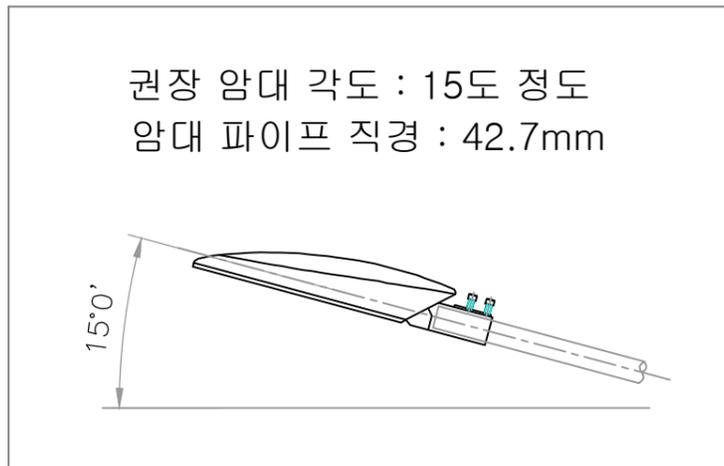

필요 공구 : L렌치 8mm --> 암대 고정
필요 공구 : L렌치 6mm --> 각도 조절

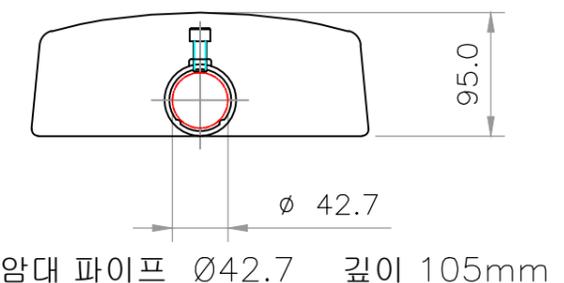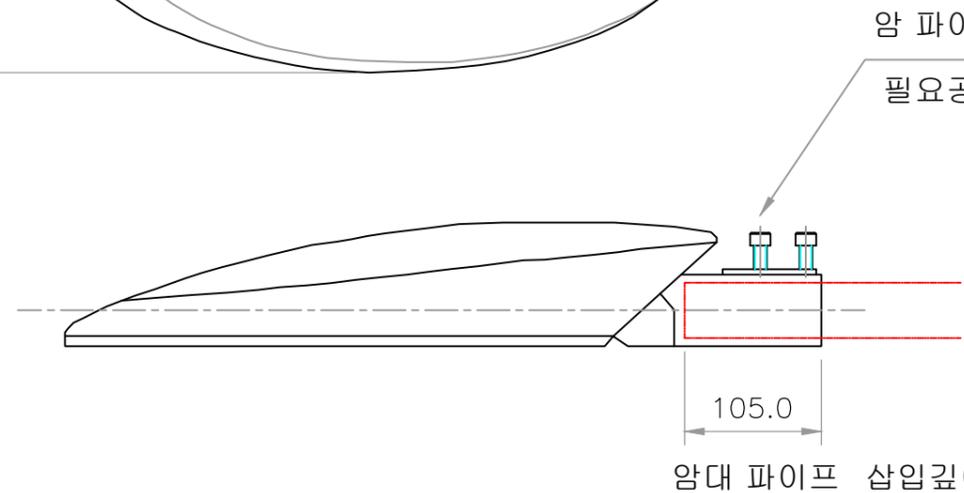

(등기구 하부)
등기구 각도 조절 M8 렌치볼트
각도 조절 범위 : +/- 15 도
필요공구 : 6mm L렌치

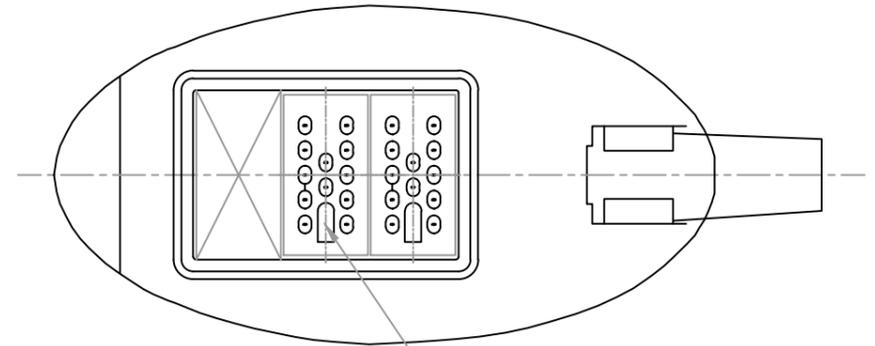

KS LED 표준모듈 [30V(10S) 및 36V(12S)]
최대 3개 장착 가능



전선길이 = 6mm
극성 : 고등색/Brown (+) , 하늘색/Skyblue (-)